


EAGLE BASKET 2" LOAD DEPTH

Straight Length - EGL2 - [W]SL - 120

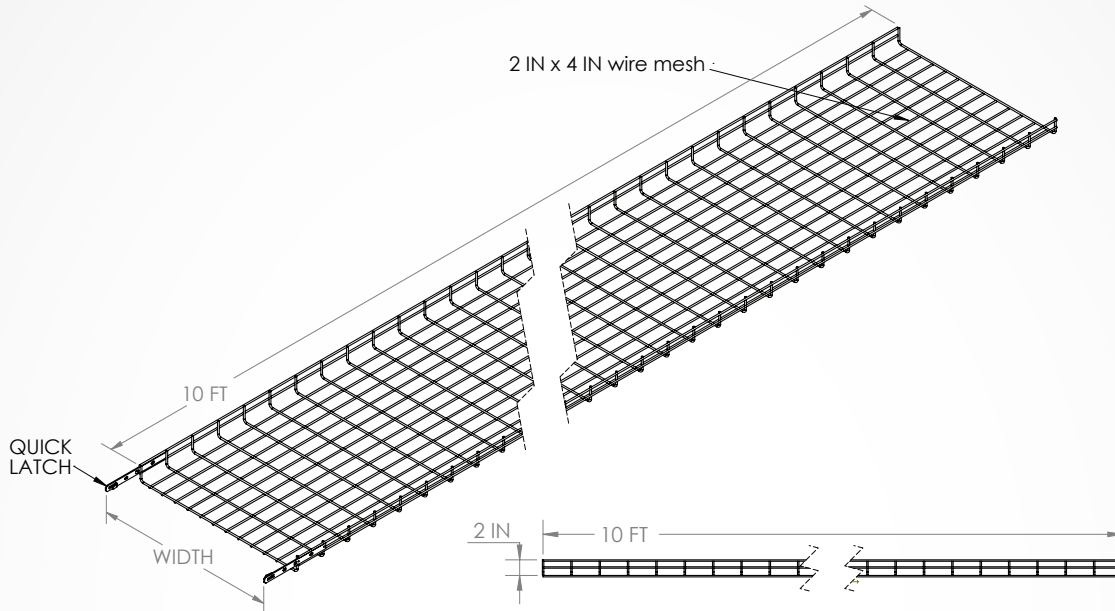

Tray Type	Load Depth (in)		Width (in)	Straight Length		Length (in)
EGL	H	-	WW	SL	-	120

Approvals		Part Description	Nominal Width	Wire Diameter	Weight (piece)	Loading (lb/ft)			
UL	cUL					5'	6'	8'	9'
		EGL2-02SL-120	2" (50 mm)	0.197"	7.8 lbs	60	42	23	19
		EGL2-04SL-120	4" (100 mm)	0.197"	9.4 lbs	60	42	23	19
		EGL2-06SL-120	6" (150 mm)	0.197"	11.0 lbs	60	42	23	19
		EGL2-08SL-120	8" (200 mm)	0.197"	12.5 lbs	89	62	35	27
		EGL2-12SL-120	12" (300 mm)	0.197"	15.7 lbs	89	62	35	27
		EGL2-16SL-120	16" (400 mm)	0.197"	18.9 lbs	149	103	58	46
		EGL2-18SL-120	18" (450 mm)	0.197"	20.4 lbs	149	103	58	46
		EGL2-20SL-120	20" (500 mm)	0.197"	22.0 lbs	149	103	58	46
		EGL2-24SL-120	24" (600 mm)	0.197"	25.2 lbs	149	103	58	46
		EGL2-30SL-120	30" (762 mm)	0.917"	29.9 lbs	149	103	58	46
		EGL2-36SL-120	36" (914 mm)	0.917"	34.6 lbs	149	103	58	46

Suffix	Material	Finish
No suffix needed	ASTM A 510 GRADE 1008	Electroplated zinc galvanized after fabrication ASTM B633
HDG	ASTM A 510 GRADE 1008	Hot Dipped Galvanized after fabrication ASTM 123
SS	304L Stainless Steel	ASTM A580
S1	316L Stainless Steel	ASTM A580
PCWT	ASTM A 510 GRADE 1008	White powder coat finish after application
PCBK	ASTM A 510 GRADE 1008	Black powder coat finish after application
PC(X)	ASTM A 510 GRADE 1008	Custom powder coat finish after application e.g. PCY = Powder coat yellow



For more info visit ustray.com